


CT101.2 BANTAM Beamer

Data Sheet



Acceptable Installation Orientations:

(consult User Instruction Manual before use)

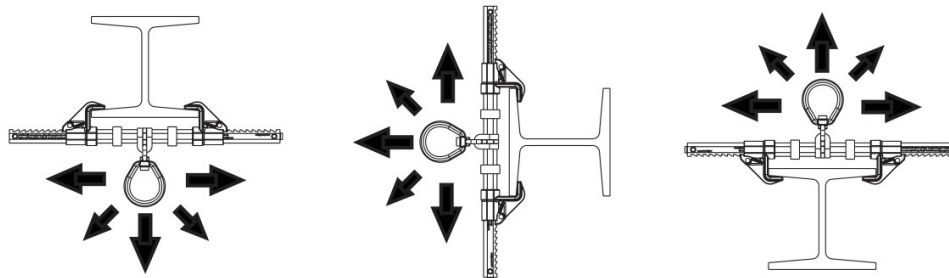

Materials:

Clamps: Bronze
Support Bar: Aluminium (7075 T6)
Swivel: Steel (Zinc Plated)
Swivel Mount: Stainless Steel
Rollers: Nylon

The ClimbTech BANTAM Beamer Beam Slider is a removable and reusable sliding I-Beam Anchor, which is easy to place, adjust and move– without the need for tools. The Beam anchor is designed to easily slide along the beam, trailing the worker, overhead or at foot level.

The Paw inserts are made from a self-lubricating Silicone Bronze Alloy, which is designed not to bind on the beam. The BANTAM is fitted with a swivel eye, which rotates through 360 degrees.

Adjustable Width	88-355mm (3 ^{1/2} —14")
Beam Flange Thickness	6.35 to 31.75mm (1/4 to 1 1/4")
Minimum Breaking Strength (MBS)	22kN (5000lbf)
Maximum User Weight	140kg (310lbs)
Working Load Limit WLL	454kg (1000lb)
Unit Weight	1.6kg (3.5lbs)
Standards	Approved to: CE EN 795:2012 Type B. Complies with: ANSI Z359.1-2007, ANSI Z359.7-2011, OSHA 1926.502, OSHA 1910.66